




MK Essentials

Designed for value



Designed for value

Introducing MK Essentials.
A value range where quality counts.



Matte Black



Titanium



Charcoal



Champagne



Pearl



**Available in
White and 5
stylish colours
to complement
any modern
interior design
theme.**

Designed for smaller budgets

Essential switches and sockets to complement all interiors. You have now choices of colours at prices that are impossible to ignore.

Whatever your needs, MK Essentials offers a range of wiring devices, including 1 and 2 gang sockets with integrated USB ports, LED dimming, a hotel pack, as well as multiple switch and socket options.



Designed for trusted reliability

Essential 'fit and forget' solutions with the reliability and performance you'd expect. Backed by MK's 25 year quality guarantee.*

From the ground-breaking Multy Kontact Socket to the first modern light switch, we've been setting the standards in reliability for over a century.

So you can specify, install and use MK Essentials with complete confidence.

Fully compliant with British Standards, MK Essentials is tested in our independently accredited testing facilities.

**Electronic products excluded*



Designed for installers first

Essential features like backed out and captive screws, ensure installation is both easy and convenient. A perfect fit every time.

Widely available and distributed nationally, every MK Essentials device comes with a screwless front plate. Simply clip on the surround to conceal any paint splatter or abrasions.






Introducing the MK Essentials Metal Front Plates

Available in 3 trendy colours

A flexible solution of metallic front plates, so you can pick the right style to suit any décor



Matte Black



Brushed Brass



Brushed Stainless Steel

Note : Metal Front plates are supplied without the functional modules. Refer to the product table for the right selection of the front plates for the respective SKU's

Designed for good looks

Essential to meeting customers' expectations, with a screwless design and a high-gloss finish for a contemporary look and feel. Clean, simple and uncomplicated.

Offering quality, reliability and style, MK Essentials now comes with newer additions to its 'White' portfolio – the popular and much sought-after **Matte Black, Titanium, Charcoal, Champagne** and **Pearl**.

Trendy and suitable for budgets of all sizes, without compromising on customer expectations and demands.

A smooth transition between device and surround prevents dust collection, whilst offering a slim understated appearance. Ideal when redecorating, the clip-on surround can be removed and clipped back on again for a neat finish.



Get the essentials right with MK Essentials



COLOUR RANGE

MK Essentials Switches are available in 1, 2, 3 and 4 gang, with standard or wide rockers. Expand the MK Essentials range with Grid Frontplates and MK's Grid Plus Modules. With over 100 modules to choose from there's a solution for all your project needs. Euro Frontplates and Modules are also available for Data, Voice and USB.



WHITE RANGE

MK Essentials LED Universal Dimmers are available in 1 and 2 gang.



HIGH GLOSS FINISH

Moulded in polycarbonate, delivering a tough robust product

TOOL FREE CLIP-ON SURROUND FIXING AND REMOVAL

Quick and secure, conceal any paint splatter or abrasions, resulting in a clean and simple design

25 YEAR
PRODUCT
GUARANTEE

BACKED BY MK'S 25 YEAR GUARANTEE*

Quality comes as standard, with the reliability and performance you'd expect from MK.

TERMINAL MARKINGS


Clearly moulded markings on rear of modules

CAPTIVE AND BACKED OUT TERMINAL SCREWS

Pre-engaged in terminal for fast and easy installation

DUAL EARTH TERMINALS

Offering total user safety for high integrity earthing applications

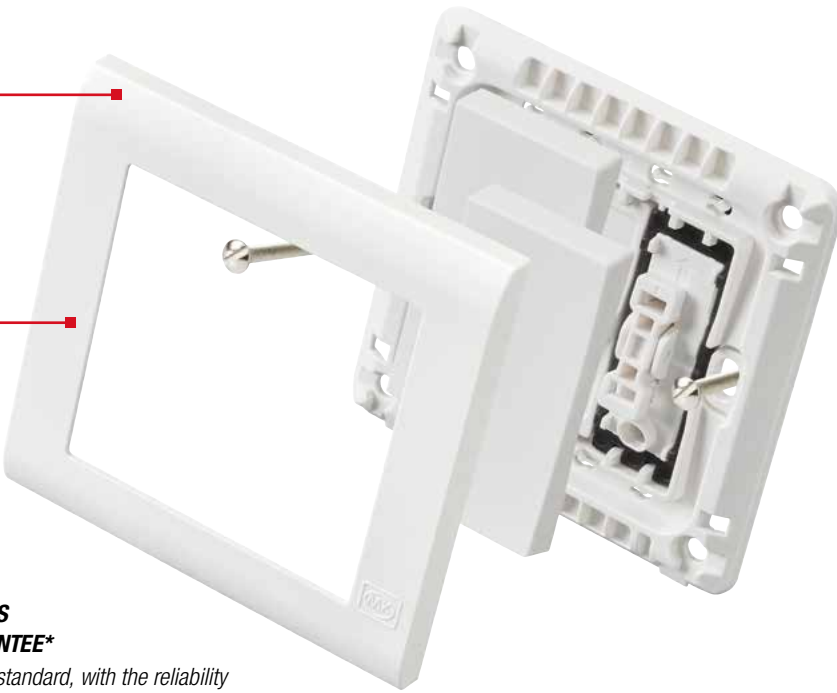

Fit and forget easy installation, simple design



Product selector

SWITCHSOCKET OUTLETS						
Flush 13 Amp						
1 GANG SP WITH DUAL EARTH TERMINALS	2 GANG SP WITH DUAL EARTH TERMINALS	1 GANG SP WITH DUAL EARTH TERMINALS WITH NEON	2 GANG SP WITH DUAL EARTH TERMINALS WITH NEON	1 GANG DP WITH DUAL EARTH TERMINALS	2 GANG DP WITH DUAL EARTH TERMINALS	1 GANG DP WITH DUAL EARTH TERMINALS WITH NEON
						
FINISH						
White (WHI)	MV2757WHI	MV2747WHI	MV2657WHI	MV2647WHI	MV2757DPWHI	MV2747DPWHI
Matte Black (MBK)	MV2757MBK	MV2747MBK	MV2657MBK	MV2647MBK	MV2757DPMBK	MV2747DPMBK
Pearl (PRL)	MV2757PRL	MV2747PRL	MV2657PRL	MV2647PRL	MV2757DPPRL	MV2657DPPRL
Charcoal (CHA)	MV2757CHA	MV2747CHA	MV2657CHA	MV2647CHA	MV2757DPCHA	MV2657DPCHA
Titanium (TTA)	MV2757TTA	MV2747TTA	MV2657TTA	MV2647TTA	MV2757DPTTA	MV2657DPTTA
Champagne (CHM)	MV2757CHM	MV2747CHM	MV2657CHM	MV2647CHM	MV2757DPCHM	MV2657DPCHM
Metal Front Plate	MVFP001***	MVFP002***	MVFP001***	MVFP002***	MVFP001***	MVFP002***
MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 SASO 2203:2018 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 SASO 2203:2018						

SWITCHSOCKET OUTLETS					
Flush 13 Amp					
2 GANG DP WITH DUAL EARTH TERMINALS WITH NEON	1 GANG DP WITH USB CHARGING PORT AND DUAL EARTH TERMINALS	1 GANG DP WITH A+C USB CHARGING PORT AND DUAL EARTH TERMINALS	2 GANG DP WITH 2 X USB CHARGING PORTS AND DUAL EARTH TERMINALS	2 GANG SP WITH 2 X USB CHARGING PORTS AND DUAL EARTH TERMINALS	2 GANG DP WITH A+C USB CHARGING PORT AND DUAL EARTH TERMINALS
					
FINISH					
White (WHI)	MV2647DPWHI	MV24354WHI	MV24454WHI	MV24344WHI	-
Matte Black (MBK)	MV2647DPMBK	MV24354MBK	MV24454MBK	MV24344MBK	MV24345MBK
Pearl (PRL)	MV2647DPPRL	MV24354PRL	MV24454PRL	MV24344PRL	MV24345PRL
Charcoal (CHA)	MV2647DPCHA	MV24354CHA	MV24454CHA	MV24344CHA	MV24345CHA
Titanium (TTA)	MV2647DPTTA	MV24354TTA	MV24454TTA	MV24344TTA	MV24350TTA
Champagne (CHM)	MV2647DPCHM	MV24354CHM	MV24454CHM	MV24344CHM	MV24350CHM
Metal Front Plate	MVFP002***	-	MVFP004***	MVFP002***	MVFP005***
MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 SASO 2203:2018 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015 MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 SASO 2203:2018 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 SASO 2203:2018 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015					

USB A+A charging Socket each capable of supporting 2.4A charge (total of 2.4A per socket). USB C Charging socket capable of supporting PD 20.0W max charge.
Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

SWITCHSOCKET OUTLETS					SCHUKO SOCKET OUTLETS		
Round Pin - Flush		International - Flush*			2 P+E - Flush 16 Amp		
1 GANG SP 5A	1 GANG DP 15A	1 GANG DP 15A WITH NEON	1 GANG DP 13A	2 GANG DP 13A	1 GANG DP 13A WITH USB CHARGING PORT	1 GANG 16A SHUTTERED	2 GANG 16A SHUTTERED
							
FINISH							
White (WHI)	MV2891WHI	MV2893WHI	MV2493WHI	MV24356WHI	MV24357WHI	MV24358WHI	MV4151WHI
Matte Black (MBK)	MV2891MBK	MV2893MBK	MV2493MBK	MV24356MBK	MV24357MBK	MV24358MBK	MV4151MBK
Pearl (PRL)	MV2891PRL	MV2893PRL	MV2493PRL	MV24356PRL	MV24357PRL	MV24358PRL	MV4151PRL
Charcoal (CHA)	MV2891CHA	MV2893CHA	MV2493CHA	MV24356CHA	MV24357CHA	MV24358CHA	MV4151CHA
Titanium (TTA)	MV2891TTA	MV2893TTA	MV2493TTA	MV24356TTA	-	MV24358TTA	MV4151TTA
Champagne (CHM)	MV2891CHM	MV2893CHM	MV2493CHM	MV24356CHM	MV24357CHM	MV24358CHM	MV4151CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP002***	-	MVFP001***
MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60884-2-3:2006 with IEC 60884-1:2022 MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 1G - 86 x 86mm FIXING CENTRES 60.3mm IEC 60884-2-3 *Not for sale in KSA MOUNTING BOX 35MM 886ZICS6-C DIMENSIONS 2G - 86 x 146mm FIXING CENTRES 120.6mm IEC 60884-2-3 *Not for sale in KSA MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 1G - 86 x 86mm FIXING CENTRES 60.3mm IEC 60884-3-1:2021 IEC 61000-6-1:2016 IEC 61000-6-3:2020 IEC 62368-1: 2018 IEC 62368-3: 2017 IEC 62680-1-1:2015 *Not for sale in KSA MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 1G - 86 x 86mm FIXING CENTRES 60.3mm IEC 60884-1:2022 MOUNTING BOX 35MM 886ZICS6-C DIMENSIONS 2G - 86 x 146mm FIXING CENTRES 120.6mm IEC 60884-1:2022							

SOCKET OUTLETS			CONNECTION UNITS			
Flush 13 Amp		Round Pin - Flush*	Switched 13 Amp			
1 GANG SP WITH DUAL EARTH TERMINALS	2 GANG SP WITH DUAL EARTH TERMINALS	1 GANG 5A SHUTTERED	DP WITH FUSE	DP WITH NEON AND FUSE	DP WITH FRONT FLEX OUTLET AND FUSE	DP WITH NEON, FRONT FLEX OUTLET AND FUSE
						
FINISH						
White (WHI)	MV780WHI	MV781WHI	MV771WHI	MV1040WHI	MV1042WHI	MV1041WHI
Matte Black (MBK)	MV780MBK	MV781MBK	-	MV1040MBK	MV1042MBK	MV1041MBK
Pearl (PRL)	MV780PRL	MV781PRL	-	MV1040PRL	MV1042PRL	MV1041PRL
Charcoal (CHA)	MV780CHA	MV781CHA	-	MV1040CHA	MV1042CHA	MV1041CHA
Titanium (TTA)	MV780TTA	MV781TTA	-	MV1040TTA	MV1042TTA	MV1041TTA
Champagne (CHM)	MV780CHM	MV781CHM	-	MV1040CHM	MV1042CHM	MV1041CHM
Metal Front Plate	MVFP001***	MVFP002***	MVFP001***	MVFP001***	MVFP001***	MVFP001***
MOUNTING BOX 35MM 1 GANG 866ZICS6-C (for extra wiring space) DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 1363-2:2023 MOUNTING BOX 35MM 2 GANG 886ZICS6-C (for extra wiring space) DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 1363-2:2023 MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS 546:1950 *Not for sale in KSA MOUNTING BOX 35MM 866ZIC DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS 1363-4:2016 FLEX OUTLET COMPLIES WITH BS 5733:2010 FUSES COMPLY WITH BS 1362: 1973						

USB A+A charging Socket each capable of supporting 2.4A charge (total of 2.4A per socket). USB C Charging socket capable of supporting PD 20.0W max charge.
Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

Product selector

CONNECTION UNITS				HIGH CURRENT DP SWITCHES			
Unswitched 13, 25, 45 Amp				20, 32 Amp			
13A WITH FRONT FLEX OUTLET AND FUSE	13A WITH NEON, FRONT FLEX OUTLET AND FUSE	25A WITH FRONT FLEX OUTLET	45A COOKER CONNECTION UNIT	1 GANG 20A DP WIDE ROCKER SWITCH WITH NEON	1 GANG 20A DP SWITCH WITH NEON AND MARKED 'WATER HEATER'	1 GANG 32A DP SWITCH WITH NEON	1 GANG 20A DP SWITCH WITH NEON
FINISH							
White (WHI)	MV1031WHI	MV1030WHI	MV1080WHI	MV1090WHI	MV4787NWHI	MV8423WHWHI	MV5105WHI
Matte Black (MBK)	MV1031MBK	MV1030MBK	MV1080MBK	MV1090MBK	MV4787NMBK	MV8423WHMBK	MV5105MBK
Pearl (PRL)	MV1031PRL	MV1030PRL	MV1080PRL	MV1090PRL	MV4787NPRL	MV8423WHPRL	MV5105PRL
Charcoal (CHA)	MV1031CHA	MV1030CHA	MV1080CHA	MV1090CHA	MV4787NCHA	MV8423WHCHA	MV5105CHA
Titanium (TTA)	MV1031TTA	MV1030TTA	MV1080TTA	MV1090TTA	MV4787NTTA	MV8423WHTTA	MV5105TTA
Champagne (CHM)	MV1031CHM	MV1030CHM	MV1080CHM	MV1090CHM	MV4787NCHM	MV8423WHCHM	MV5105CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	-	MVFP003***	MVFP001***	MVFP001***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS 1363-4:2016 FLEX OUTLET COMPLIES WITH BS 5733:2010 FUSES COMPLY WITH BS 1362:1973		MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm FLEX OUTLET COMPLIES WITH BS 5733:2010		MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017			

HIGH CURRENT DP SWITCHES					
45 Amp					
1 GANG DP SWITCH	1 GANG DP SWITCH WITH NEON	2 GANG DP SWITCH WITH NEON AND MARKED 'COOKER'	2 GANG DP SWITCH	2 GANG DP SWITCH WITH NEON	
FINISH					
White (WHI)	MV5205WHI	MV5205NWHI	MV5215NCWHI	-	MV5215NWHI
Matte Black (MBK)	MV5205MBK	MV5205NMBK	MV5215NCMBK	-	MV5215NMBK
Pearl (PRL)	MV5205PRL	MV5205NPRL	MV5215NCPRL	-	MV5215NPRL
Charcoal (CHA)	MV5205CHA	MV5205NCHA	MV5215NCCHA	-	MV5215NCHA
Titanium (TTA)	MV5205TTA	MV5205NTTA	MV5215NCTTA	-	MV5215NTTA
Champagne (CHM)	MV5205CHM	MV5205NCHM	-	MV5215CHM	MV5215NCHM
Metal Front Plate	MVFP001***	MVFP001***	-	-	-
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017			MOUNTING BOX 35MM 886Z/CS6-C DIMENSIONS 146 x 86mm FIXING CENTRES 120.6mm BS EN 60669-1:2018		

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

PLATESWITCHES					
Flush 10 Amp					
1 GANG SP ONE-WAY	1 GANG SP TWO-WAY	2 GANG SP ONE-WAY	2 GANG SP TWO-WAY	3 GANG SP ONE-WAY	3 GANG SP TWO-WAY
FINISH					
White (WHI)	MV4861W1WHI	MV4861WHI	MV4862W1WHI	MV4862WHI	MV4863W1WHI
Matte Black (MBK)	MV4861W1MBK	MV4861MBK	-	MV4862MBK	MV4863W1MBK
Pearl (PRL)	MV4861W1PRL	MV4861PRL	MV4862W1PRL	MV4862PRL	MV4863W1PRL
Charcoal (CHA)	MV4861W1CHA	MV4861CHA	MV4862W1CHA	MV4862CHA	MV4863W1CHA
Titanium (TTA)	MV4861W1TTA	MV4861TTA	MV4862W1TTA	MV4862TTA	MV4863W1TTA
Champagne (CHM)	MV4861W1CHM	MV4861CHM	MV4862W1CHM	MV4862CHM	MV4863W1CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017					

PLATESWITCHES					
Flush 10 Amp					
4 GANG SP ONE-WAY	4 GANG SP TWO-WAY	5 GANG SP ONE-WAY	1 GANG SP INTERMEDIATE	1 GANG SP PUSH SWITCH WITH BELL SYMBOL	1 GANG SP PUSH SWITCH
FINISH					
White (WHI)	MV4864W1WHI	MV4864WHI	MV4865W1WHI	-	MV4867WHI
Matte Black (MBK)	MV4864W1MBK	MV4864MBK	MV4865W1MBK	MV4866MBK	MV4867MBK
Pearl (PRL)	MV4864W1PRL	-	MV4865W1PRL	MV4866PRL	MV4867PRL
Charcoal (CHA)	MV4864W1CHA	-	MV4865W1CHA	MV4866CHA	MV4867CHA
Titanium (TTA)	MV4864W1TTA	MV4864TTA	MV4865W1TTA	MV4866TTA	MV4867TTA
Champagne (CHM)	MV4864W1CHM	MV4864CHM	MV4865W1CHM	MV4866CHM	MV4867CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017					

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

Product selector

WIDE ROCKER SWITCHES								
Flush 10 Amp								
1 GANG SP ONE-WAY	1 GANG SP TWO-WAY	2 GANG SP ONE-WAY	2 GANG SP TWO-WAY	3 GANG SP ONE-WAY	3 GANG SP TWO-WAY	4 GANG SP ONE-WAY	4 GANG SP TWO-WAY	
								
FINISH								
White (WHI)	MV4781W1WHI	MV4781WHI	MV4782W1WHI	MV4782WHI	MV4783W1WHI	MV4783WHI	MV4784W1WHI	MV4784WHI
Matte Black (MBK)	MV4781W1MBK	MV4781MBK	MV4782W1MBK	MV4782MBK	MV4783W1MBK	MV4783MBK	MV4784W1MBK	MV4784MBK
Pearl (PRL)	MV4781W1PRL	MV4781PRL	MV4782W1PRL	MV4782PRL	MV4783W1PRL	MV4783PRL	MV4784W1PRL	MV4784PRL
Charcoal (CHA)	MV4781W1CHA	MV4781CHA	MV4782W1CHA	MV4782CHA	MV4783W1CHA	MV4783CHA	MV4784W1CHA	MV4784CHA
Titanium (TTA)	MV4781W1TTA	MV4781TTA	MV4782W1TTA	MV4782TTA	MV4783W1TTA	MV4783TTA	MV4784W1TTA	MV4784TTA
Champagne (CHM)	MV4781W1CHM	MV4781CHM	MV4782W1CHM	MV4782CHM	MV4783W1CHM	MV4783CHM	MV4784W1CHM	MV4784CHM
Metal Front Plate	MVFP003***	MVFP003***	MVFP003***	MVFP003***	MVFP003***	MVFP003***	-	-
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017								

WIDE ROCKER SWITCHES								
Flush 10 Amp				Switches 20 Amp				
6 GANG SP ONE-WAY	1 GANG SP PUSH SWITCH WITH BELL SYMBOL	1 GANG SP PUSH SWITCH	1 GANG SP PUSH SWITCH MARKED 'PRESS'	1GANG SP INTERMEDIATE	1 GANG SP ONE-WAY	1 GANG SP TWO-WAY	2 GANG SP ONE-WAY	
								
FINISH								
White (WHI)	MV4799WHI	MV4778BWHI	MV4786WHI	MV4786PWHI	MV4785WHI	MV4787W1WHI	MV4787WHI	MV4788W1WHI
Matte Black (MBK)	MV4799MBK	MV4778BMBK	MV4786MBK	MV4786PMBK	MV4785MBK	MV4787W1MBK	MV4787MBK	MV4788W1MBK
Pearl (PRL)	MV4799PRL	MV4778BPRL	MV4786PRL	MV4786PPRL	MV4785PRL	MV4787W1PRL	MV4787PRL	MV4788W1PRL
Charcoal (CHA)	MV4799CHA	MV4778BCHA	MV4786CHA	MV4786PCHA	MV4785CHA	MV4787W1CHA	MV4787CHA	MV4788W1CHA
Titanium (TTA)	MV4799TTA	MV4778BTTA	MV4786TTA	MV4786PTTA	MV4785TTA	MV4787W1TTA	MV4787TTA	-
Champagne (CHM)	MV4799CHM	MV4778BCHM	MV4786CHM	MV4786PCHM	MV4785CHM	MV4787W1CHM	MV4787CHM	MV4788W1CHM
Metal Front Plate	-	MVFP003***	MVFP003***	MVFP003***	MVFP003***	MVFP003***	MVFP003***	MVFP003***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 146mm FIXING CENTRES 120.6mm IEC 60669-1:2017 MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017 MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS EN 60669-1:2018								

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18


WIDE ROCKER SWITCHES						
Switches 20 Amp						
2 GANG SP TWO-WAY	3 GANG SP ONE-WAY	3 GANG SP TWO-WAY	4 GANG SP ONE-WAY (3 X 6)	4 GANG SP TWO-WAY (3 X 6)	1 GANG SP INTERMEDIATE	
						
FINISH						
White (WHI)	MV4788WHI	MV4789W1WHI	MV4789WHI	MV4790W1WHI	MV4790WHI	MV4791WHI
Matte Black (MBK)	MV4788MBK	MV4789W1MBK	-	MV4790W1MBK	MV4790MBK	MV4791MBK
Pearl (PRL)	MV4788PRL	MV4789W1PRL	MV4789PRL	MV4790W1PRL	MV4790PRL	MV4791PRL
Charcoal (CHA)	MV4788CHA	MV4789W1CHA	MV4789CHA	MV4790W1CHA	MV4790CHA	MV4791CHA
Titanium (TTA)	MV4788TTA	-	MV4789TTA	MV4790W1TTA	MV4790TTA	MV4791TTA
Champagne (CHM)	MV4788CHM	MV4789W1CHM	MV4789CHM	MV4790W1CHM	MV4790CHM	MV4791CHM
Metal Front Plate	MVFP003***	MVFP003***	MVFP003***	-	-	MVFP003***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017 MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 146mm FIXING CENTRES 120.6mm IEC 60669-1:2017 MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 60669-1:2017						


DIMMER SWITCHES				INTELLIGENT LED DIMMER SWITCHES	
220V TO 240V A.C 50/60 Hz Standard				220V to 240V a.c. 50/60Hz LED, tungsten filament and low voltage halogen lighting	
1 GANG 600W TWO-WAY	1 GANG 1000W TWO-WAY	1 GANG 250VA FAN SPEED CONTROL		1 GANG LED DIMMER	2 GANG LED DIMMER
					
FINISH					
White (WHI)	MV1512WHI	MV1535WHI	MV1550WHI	MV1523WHI	MV1524WHI
Matte Black (MBK)	-	MV1535MBK	MV1550MBK	MV1523MBK	MV1524MBK
Pearl (PRL)	-	MV1535PRL	MV1550PRL	MV1523PRL	MV1524PRL
Charcoal (CHA)	-	MV1535CHA	MV1550CHA	MV1523CHA	MV1524CHA
Titanium (TTA)	-	MV1535TTA	MV1550TTA	MV1523TTA	MV1524TTA
Champagne (CHM)	-	MV1535CHM	-	MV1523CHM	MV1524CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP002***
MOUNTING BOX 35MM 866Z/CS6-C DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS EN 60669-2-1 IEC 60669-2-1 MOUNTING BOX 35MM 1 GANG 866Z/CS6-C DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS EN 60669-2-1 IEC 60669-2-1 MOUNTING BOX 35MM 2 GANG 866Z/CS6-C DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS EN 60669-2-1 IEC 60669-2-1 RC DIMMER (TRAILING EDGE) Voltage: 220-240V AC Frequency: 50/60Hz RATING Incandescent: 10-200W Halogen lamp with electronic transformer: 35-200W Dimmable LEDs: 6-100W					


Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671.

*** Please refer to the finishes in page 18

Product selector

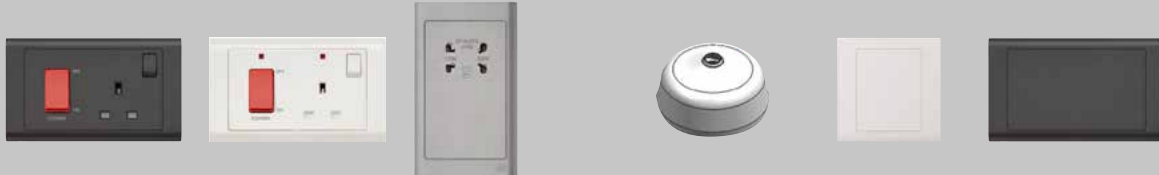COOKER CONTROLS		SHAVER/TOOTHBRUSH SUPPLY UNIT	CEILING ROSE	BLANK PLATES		
Moulded Flush 45 Amp						
DP SWITCH AND 13A SWITCHSOCKET OUTLET	DP SWITCH AND 13A SWITCHSOCKET OUTLET WITH NEON	SHAVER/TOOTHBRUSH SUPPLY UNIT DUAL VOLTAGE 115/230V OUTPUT (220/240V 50/60HZ INPUT)	3-PIN 6A PLUG-IN CEILING ROSE	1 GANG BLANK PLATE	2 GANG BLANK PLATE	
						
FINISH						
White (WHI)	MV5060WHI	MV5061WHI	MV701WHI	MV3240WHI	MV3827WHI	MV3828WHI
Matte Black (MBK)	MV5060MBK	MV5061MBK	MV701MBK	-	MV3827MBK	MV3828MBK
Pearl (PRL)	MV5060PRL	MV5061PRL	MV701PRL	-	MV3827PRL	MV3828PRL
Charcoal (CHA)	MV5060CHA	MV5061CHA	MV701CHA	-	MV3827CHA	MV3828CHA
Titanium (TTA)	MV5060TTA	-	MV701TTA	-	MV3827TTA	MV3828TTA
Champagne (CHM)	MV5060CHM	-	MV701CHM	-	MV3827CHM	MV3828CHM
Metal Front Plate	MVFP002***	MVFP002***	MVFP002***	-	MVFP001***	MVFP002***
MOUNTING BOX 35MM 886ZICS6-C DIMENSIONS 86 x 146mm FIXING CENTRES 120.6mm SASO 2203:2018 IEC 60669-1:2017		MOUNTING BOX 35MM 886ZICS6-C DIMENSIONS 146 x 86mm FIXING CENTRES 60.3mm IEC 61558-2-5:2010		Voltage:250VAC Current: 6A DIMENSIONS 1G - 75mm Dia. x 45mm x 7mm depth FIXING CENTRES 50.8mm Diagonal BESA BS 6972:1988+Amd1: 1996	MOUNTING BOX 35MM 1 GANG 866ZICS6-C DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 5733:2010	MOUNTING BOX 35MM 2 GANG 886ZICS6-C DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 5733:2010

METAL FRONTPLATES			
FRONT PLATES			
1 GANG SOCKET FRONT PLATE	2 GANG SOCKET FRONT PLATE	1 GANG SWITCH FRONT PLATE	
NEW   			
FINISH			
Matte Black (MBK)	MVFP001MBK	MVFP002MBK	MVFP003MBK
Brushed Stainless Steel (BSS)	MVFP001BSS	MVFP002BSS	MVFP003BSS
Brushed Brass (BRZ)	MVFP001BRZ	MVFP002BRZ	MVFP003BRZ

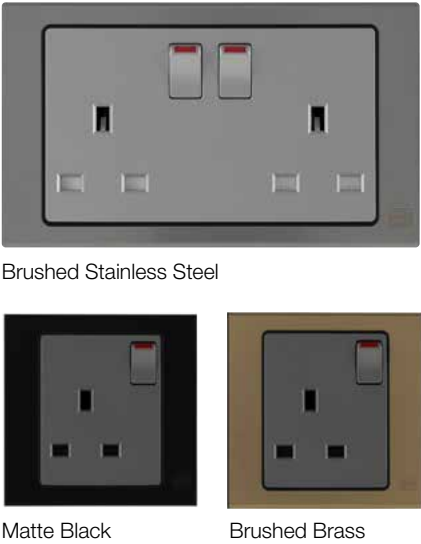

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

HOTEL PACK		EURO MODULAR FRONTPLATES					
KEY CARD SWITCH 50HZ/60HZ	2 GANG 10A SERVICE AND DO NOT DISTURB SWITCH WITH INDICATOR	1 GANG TWO-WAY BELL SWITCH WITH INDICATOR	2 GANG SHUTTER SWITCH FOR ROLLER BLINDS	1 GANG FRONTPLATE ONE MODULE APERTURE SIZE 25 X 50MM	1 GANG FRONTPLATE TWO MODULE APERTURE SIZE 50 X 50MM	2 GANG FRONTPLATE FOUR MODULE APERTURE SIZE 100 X 50MM	
							
FINISH							
White (WHI)	MV4324WHI	MV4327WHI	MV4328WHI	MV4329WHI	MV181WHI	MV182WHI	MV184WHI
Matte Black (MBK)	MV4324MBK	MV4327MBK	MV4328MBK	MV4329MBK	MV181MBK	MV182MBK	MV184MBK
Pearl (PRL)	MV4324PRL	MV4327PRL	MV4328PRL	MV4329PRL	MV181PRL	MV182PRL	MV184PRL
Charcoal (CHA)	MV4324CHA	MV4327CHA	MV4328CHA	MV4329CHA	MV181CHA	MV182CHA	MV184CHA
Titanium (TTA)	MV4324TTA	MV4327TTA	MV4328TTA	MV4329TTA	MV181TTA	MV182TTA	MV184TTA
Champagne (CHM)	MV4324CHM	MV4327CHM	MV4328CHM	MV4329CHM	MV181CHM	MV182CHM	MV184CHM
Metal Front Plate	-	MVFP003***	MVFP003***	MVFP003***	MVFP001***	MVFP001***	MVFP002***
MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS EN 60669-1:1999 KEY CARD SWITCH BS EN 60669-2-1 IEC 60669-2-1		MOUNTING BOX 35MM 866ZICS6-C DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS EN 60669-1:2018 IEC 60669-1:2017		MOUNTING BOX 35MM 1 GANG 866ZICS6-C DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 5733:2010		MOUNTING BOX 35MM 2 GANG 886ZICS6-C DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 5733:2010	

GRID PLUS FRONTPLATES				DATA, VOICE AND TV		
Data Sockets						
1 MODULE FRONT PLATE	2 MODULE FRONT PLATE	3 MODULE FRONT PLATE	4 MODULE FRONT PLATE			
						
FINISH						
White (WHI)	MV3631WHI	MV3632WHI	MV3633WHI	MV3634WHI	MV428WHI	MV429WHI
Matte Black (MBK)	MV3631MBK	MV3632MBK	MV3633MBK	MV3634MBK	MV428MBK	MV429MBK
Pearl (PRL)	MV3631PRL	MV3632PRL	MV3633PRL	MV3634PRL	MV428PRL	MV429PRL
Charcoal (CHA)	MV3631CHA	MV3632CHA	MV3633CHA	MV3634CHA	MV428CHA	MV429CHA
Titanium (TTA)	MV3631TTA	MV3632TTA	MV3633TTA	MV3634TTA	MV428TTA	MV429TTA
Champagne (CHM)	MV3631CHM	MV3632CHM	MV3633CHM	MV3634CHM	MV428CHM	MV429CHM
Metal Front Plate	-	-	-	-	MVFP001***	MVFP001***
MOUNTING BOX 35MM 1 GANG 866ZICS6-C MOUNTING FRAMES 1G: K3701 DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 5733:2010		MOUNTING BOX 35MM 1 GANG 866ZICS6-C MOUNTING FRAMES 2G: K3702 DIMENSIONS 1G: 86 x 86mm FIXING CENTRES 60.3mm BS 5733:2010		MOUNTING BOX 35MM 2 GANG 886ZICS6-C MOUNTING FRAMES 3G: K3703 DIMENSIONS 2G: 86 x 146mm FIXING CENTRES 120.6mm BS 5733:2010		MOUNTING BOX 46MM 877ZIC DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm IEC 1180 EN 50173 TIA 568 EN41003

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18

Product selector

DATA, VOICE AND TV								
Telephone Outlets			TV Outlets					
1 GANG RJ11 4 WIRE TELEPHONE SOCKET	1 GANG DOUBLE RJ11 4 WIRE TELEPHONE SOCKET	1 GANG BT TELEPHONE SOCKET (MASTER)	1 GANG SINGLE OUTLET MALE NON-ISOLATED TV SOCKET	1 GANG SINGLE OUTLET FEMALE NON-ISOLATED TV SOCKET	1 GANG SINGLE OUTLET ISOLATED TV SOCKET	TWIN TV/FM DIPLEXER	1 GANG SINGLE OUTLET CABLE TV 'F' TYPE CONNECTOR	
								
FINISH								
White (WHI)	MV417WHI	MV418WHI	MV422WHI	MV3520WHI	MV3521WHI	MV3522WHI	MV3523WHI	MV3529WHI
Matte Black (MBK)	MV417MBK	MV418MBK	-	MV3520MBK	MV3521MBK	-	-	MV3529MBK
Pearl (PRL)	MV417PRL	MV418PRL	-	MV3520PRL	MV3521PRL	-	-	MV3529PRL
Charcoal (CHA)	MV417CHA	MV418CHA	-	MV3520CHA	MV3521CHA	-	-	MV3529CHA
Titanium (TTA)	MV417TTA	MV418TTA	-	MV3520TTA	MV3521TTA	-	-	MV3529TTA
Champagne (CHM)	MV417CHM	MV418CHM	-	MV3520CHM	MV3521CHM	-	-	MV3529CHM
Metal Front Plate	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***	MVFP001***
MOUNTING BOX 35MM 866ZICS6-C (for extra wiring space) DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm MV417WHI & MV418WHI FCC68 EN41003			MOUNTING BOX 35MM 866ZICS6-C (for extra wiring space) DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm MV422WHI&MV427WHI BS5733:2010			MOUNTING BOX 35MM 866ZICS6-C (for extra wiring space) DIMENSIONS 86 x 86mm FIXING CENTRES 60.3mm BS 5733:2010		

EURO POWER MODULES						
UK 1 GANG EURO 2 MODULE 13A 250V SHUTTERED	GERMAN 2P+E 16A 250V SHUTTERED EURO 2 MODULE (NON UK)	AMERICAN 2P+E 15A 127V SHUTTERED EURO 2 MODULE (NON UK)	UK 1 GANG EURO 2 MODULE 5A 250V SHUTTERED	FRENCH/BELGIAN 2P+E 16A 250V SHUTTERED EURO 2 MODULE (NON UK)	USB CHARGING MODULE EURO 2 MODULE	
						
FINISH						
White (WHI)	K5830WHI	K5831WHI	K5832WHI	K5833WHI	K5834WHI	K5847WHI
Black (BLK)	K5830BLK	K5831BLK	K5832BLK	K5833BLK	K5834BLK	K5847BLK
MOUNTING BOX 35mm minimum 46mm (for extra wiring space) DIMENSIONS 50 x 50mm BS 1363 Pt2:1995		MOUNTING BOX 46mm DIMENSIONS 50 x 50mm IEC 60884-1:2006	MOUNTING BOX 35mm 46mm (for extra wiring space) DIMENSIONS 50 x 50mm SASO 2204:2003	MOUNTING BOX 35mm minimum 46mm (for extra wiring space) DIMENSIONS 50 x 50mm BS 546:1950	MOUNTING BOX 46mm DIMENSIONS 50 x 50mm NF C61-314	MOUNTING BOX 35 minimum 46mm (for extra wiring space) DIMENSIONS 50 x 50mm IEC 60950-1 IEC 61000-6-1/3

Dual Earth: Fitted with two earth terminals to provide a double earth facility connection as specified within BS 7671. *** Please refer to the finishes in page 18


EURO DATACOM MODULES										
RJ45 CAT 6a		RJ45 CAT 6			RJ45 CAT 5e		RJ11/12	Telephone		
1 MODULE 25 X 50MM	SCREENED 1 MODULE 25 X 50MM	1 MODULE 25 X 50MM	SCREENED 1 MODULE 25 X 50MM	ANGLED 1 MODULE 25 X 50MM	ANGLED 1 MODULE 25 X 50MM	1 MODULE 25 X 50MM	1 MODULE 25 X 50MM	MASTER 1 MODULE 25 X 50MM	SECONDARY 1 MODULE 25 X 50MM	
										
FINISH										
White (WHI)	K5841WHI	K5841SWHI	K5846SAWHI	K5846SWHI	K5864WHI	K5844WHI	K5845WHI	K5887SAWHI	K5820WHI	K5821WHI
Black (BLK)	K5841BLK	-	K5846BLK	K5846SBLK	-	-	K5845BLK	K5887BLK	K5820BLK	K5821BLK
Cat 6A performance. Suitable for both 568A and 568B wiring schemes. MOUNTING BOXES Minimum Box Depth 35mm ISO/IEC 11801 EN 50173 TIA 568 EN 41003			Cat 6 performance. Suitable for both 568A and 568B wiring schemes. MOUNTING BOXES Minimum Box Depth 35mm ISO/IEC 11801 EN 50173 TIA 568 EN 41003			Enhanced Cat 5 performance. Suitable for both 568A and 568B wiring schemes. Supplied with cable tie and cable anchors to secure wires in the connectors. MOUNTING BOXES Minimum box depth 25mm standard ISO/IEC 11801 EN 50173 TIA 568 EN 41003		Suitable for both RJ11 and RJ12 jacks RJ11: 4 wire RJ12: 6 wire MOUNTING BOXES Minimum box depth 25mm FCC68 EN 41003		MOUNTING BOXES Minimum depth 25mm BS 6312 Pt 2
EURO MULTIMEDIA MODULES										
TV Co-Axial Outlets for Digital TV screened - Non-isolated								HDMI		
SINGLE OUTLET (IEC MALE) 1 MODULE 25 X 50MM	SINGLE OUTLET (IEC FEMALE) 1 MODULE 25 X 50MM	SINGLE F-TYPE SATELLITE SOCKET 1 MODULE 25 X 50MM	TWIN OUTLET TV-FM/DAB DIPLEXER 2 MODULE 50 X 50MM	TRIPLE OUTLET TV/FM/ SATELLITE TRIPLEXER 2 MODULE 50 X 50MM	QUAD OUTLET TV-FM/DAB-2XSAT 2 MODULE 50 X 50MM	FEMALE HDMI OUTLET				
										
FINISH										
White (WHI)	K5850WHI	K5851WHI	K5855WHI	K5852MWHI	K5853MWHI	K5854MWHI	K5807WHI			
Black (BLK)	K5850BLK	K5851BLK	K5855BLK	K5852MBLK	K5853MBLK	K5854MBLK	K5807BLK			
Fully screened non isolated TV outlets containing a combination of single, TV/FM Diplexer and TV/FM/SAT Triplexer for use within digital TV systems and interactive TV services. Single outlets for connection to a single TV, FM or Satellite co-axial aerial lead.				TV/FM diplexer units for connection to a single co-axial aerial lead with combined TV and FM signals. TV/FM/SAT triplexer units for connection to a single co-axial aerial lead with combined TV, FM and Satellite signals			5807 Female HDMI Outlet is HDMI 1.1, 1.2, 1.3 and 1.4 compatible, HDCP compliant. DATA RATE Up to 2.25 Gbps SCAN Up to 1080p/1920x1200 INPUT CONNECTOR 1 x HDMI Female (Type A) OUTPUT CONNECTOR 1 x HDMI Female (Type A) Supports high resolution input PC VGA, SVGA, SXVGA (1280x1024) and UXGA (1600x1200, 1920x1200) HDTV 480p, 720p, 1080i and 1080p HDMI input cable should be no larger than 20m. DIMENSIONS 50 x 50 x 20mm			
THESE PRODUCTS ARE FULLY COMPATIBLE WITH LABGEAR TV DISTRIBUTION SYSTEMS AND ARE APPROVED FOR USE IN "SKY HOMES" AND "HOMES ON" SPECIFICATIONS										
MOUNTING BOXES Min box depth 32mm DIMENSIONS 1 Module 25 x 50mm 2 Module 50 x 50mm BS 304:11997 IEC 169-2:1965 BS EN 50083 & BS 5733:2010 where applicable		PERFORMANCE SINGLE OUTLETS TV/FM Iec Male Or Female DC-950MHz SAT F-TYPE DC-1.75GHz	TV/FM/SAT PRODUCTS Outlet: TV: FM/DAB: SAT: Triplexer Outlet: TV: FM: SAT1:	TV/FM/DAB/SAT PRODUCTS FOR DIGITAL RADIO Outlet: TV: FM/DAB: SAT OR SAT1: SAT2: Outlet: TV: FM: SAT1: SAT2:						

Mains operated products and extra low voltage modules must not be installed within the same frontplate. Refer to BS 7671 IET Wiring Regulations for details.

Product selector

EURO MULTIMEDIA MODULES						
Audio		Blanks				
AUDIO BINDING POST SET FOR SINGLE LOUD SPEAKER	RCA TO SCREW TERMINATION SET 1 RED AND 1 BLACK	2 MODULE BLANK 50 X 50MM	1 MODULE BLANK 25 X 50MM	HALF MODULE BLANK 12.5 X 50MM	1 MODULE ADAPTOR*	
FINISH						
White (WHI)	K5805WHI	K5806WHI	K180WHI	K188WHI	K186WHI	EX5453WHI*
Black (BLK)	K5805BLK	K5806BLK	-	K188BLK	K186BLK	-
DIMENSIONS 50 x 25 x 28mm			BS 5733:2010 where applicable			

BLANK INSERTS SWITCH MODULES 10 AMP								
1 MODULE	1 WAY SP	1 WAY DP	2 WAY SP	2 WAY RETRACTIVE SWITCH SP	2 WAY RED RETRACTIVE SWITCH SP	2 WAY RETRACTIVE SWITCH MARKED WITH BELL SYMBOL SP	2 WAY RETRACTIVE SWITCH MARKED 'PRESS' SP	
								
FINISH								
White (WHI)	K4880WHI	K4881WHI	K4981WHI	K4882WHI	K4885WHI	K4885RED	K4885BWHI	K4885PWHI
Black (BLK)	K4880BLK	K4881BLK	K4981BLK	K4882BLK	K4885BLK	K4885REDB	K4885BBLK	K4885PBLK
Graphite (GRA)	K4880GRA	K4881GRA	-	K4882GRA	-	-	-	-
These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999					NOTE Push switches are not designed for fluorescent loads. BS EN 60669-1:1999			

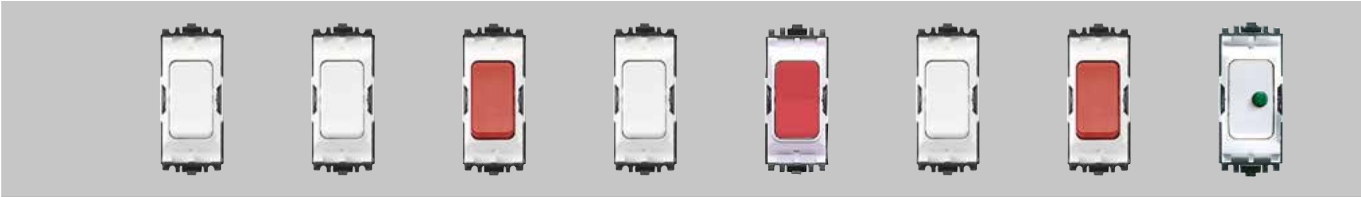SWITCH MODULES 20 AMP							
1 WAY SP	1 WAY PUSH TO MAKE DP	1 WAY RED ROCKER PUSH TO MAKE DP	1 WAY PUSH TO BREAK RETRACTIVE DP	1 WAY RED ROCKER PUSH TO BREAK RETRACTIVE DP	2 WAY SP	2 WAY RED ROCKER SP	2 WAY SWITCH WITH INTEGRAL NEON LOCATOR SP
							
FINISH							
White (WHI)	K4891WHI	K4910WHI	K4910RED	K4915WHI	K4915RED	K4892WHI	K4892LWHI
Black (BLK)	K4891BLK	K4910BLK	K4910REDB	K4915BLK	K4915REDB	K4892BLK	K4892LDBLK
Graphite (GRA)	K4891GRA	-	-	-	-	-	-
These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999		NOTE Push switches are not designed for fluorescent loads. BS EN 60669-1:1999			These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999		

SWITCH MODULES 20 AMP								
2 WAY AND CENTRE OFF SP	RED ROCKER 2 WAY AND CENTRE OFF SP	INTERMEDIATE	INTERMEDIATE RED ROCKER	1 WAY DP	1 WAY NEON DP	1 WAY WITH WINDOW DP	1 WAY RED ROCKER DP	
								
FINISH								
White (WHI)	K4899LWHI	K4899RED	K4893WHI	K4893RED	K4896WHI	K4896NWHI	K4896WWHI	K4896RED
Black (BLK)	K4899LBLK	K4899REDB	K4893BLK	K4893REDB	K4896BLK	K4896NBLK	K4896EBLK	K4896REDB
Graphite (GRA)	-	-	-	-	K4896GRA	K4896NGRA	-	-
These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999								

Product selector

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP								
1 WAY BOILER DP	1 WAY BOILER NEON DP	1 WAY DISHWASHER DP	1 WAY DISHWASHER NEON DP	1 WAY COOKER HOOD DP	1 WAY COOKER HOOD NEON DP	1 WAY FAN DP	1 WAY FAN NEON DP	
								
FINISH								
White (WHI)	K4896BRWHI	K4896NBRWHI	K4896DWWHI	K4896NDWWHI	K4896CHWHI	K4896NCHWHI	K4896FNWHI	K4896NFNWHI
Black (BLK)	K4896BRBLK	K4896NBRBLK	K4896DWBLK	K4896NDWBLK	K4896CHBLK	K4896NCHBLK	K4896FNBLK	K4896NFNBLK
BS EN 60669-1:1999								

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP								
1 WAY FRIDGE DP	1 WAY FRIDGE NEON DP	1 WAY FREEZER DP	1 WAY FRIDGE FREEZER DP	1 WAY FRIDGE FREEZER NEON DP	1 WAY WASTE DISPOSAL DP	1 WAY WASTE DISPOSAL NEON D	1 WAY WASHING MACHINE DP	
								
FINISH								
White (WHI)	K4896FGWHI	K4896NFGWHI	K4896FZWHI	K4896NFZWHI	K4896FFWHI	K4896NFFWHI	K4896WDWHI	K4896NWDWHI
Black (BLK)	K4896FGBLK	K4896NFGBLK	K4896FZBLK	K4896NFZBLK	K4896FFBLK	K4896NFFBLK	K4896WDBLK	K4896NWDBLK
BS EN 60669-1:1999								

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP								
1 WAY WASHING MACHINE DP	1 WAY WASHING MACHINE NEON DP	1 WAY TUMBLE DRYER DP	1 WAY TUMBLE DRYER NEON DP	1 WAY WASHER DRYER DP	1 WAY WASHER DRYER NEON DP	1 WAY MICROWAVE DP	1 WAY MICROWAVE NEON DP	
								
FINISH								
White (WHI)	K4896WMWHI	K4896NWMWHI	K4896TDWHI	K4896NTDWHI	K4896WDRWHI	K4896NWDRWHI	K4896MWWHI	K4896NMWWHI
Black (BLK)	K4896WMBLK	K4896NWMBLK	K4896TDBLK	K4896NTDBLK	K4896WDRBLK	K4896NWDRBLK	K4896MWBLK	K4896NMWBLK
BS EN 60669-1:1999								

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP								
1 WAY HEATER DP	1 WAY HEATER NEON DP	1 WAY OVEN DP	1 WAY OVEN NEON DP	1 WAY HOB DP	1 WAY HOB NEON DP	1 WAY IMMERSION HEATER DP	1 WAY IMMERSION HEATER NEON DP	
								
FINISH								
White (WHI)	K4896HRWHI	K4896NHRWHI	K4896OVWHI	K4896NOVWHI	K4896HBWHI	K4896NHBWHI	K4896IHWHI	K4896NIHWHI
Black (BLK)	K4896HRBLK	K4896NHRBLK	K4896OVBLK	K4896NOVBLK	K4896HDBLK	K4896NHBBLK	K4896IHBLK	-
BS EN 60669-1:1999								

Product selector

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP								
1 WAY PLINTH HEATER DP	1 WAY PLINTH HEATER NEON DP	1 WAY WORKTOP LIGHTING DP	1 WAY WORKTOP LIGHTING NEON DP	1 WAY WINE COOLER DP	1 WAY WINE COOLER NEON DP	1 WAY WARMING DRAWER DP	1 WAY WARMING DRAWER NEON DP	
								
FINISH								
White (WHI)	K4896PHWHI	K4896NPHWHI	K4896WLWHI	K4896NWLWHI	K4896WCWHI	K4896NWCWHI	K4896WDAWHI	K4896NDAWHI
Black (BLK)	K4896PHBLK	-	K4896WLBLK	K4896NWLBLK	K4896WCBLK	K4896NWCBLK	K4896WDABLK	K4896NWDABLK
BS EN 60669-1:1999								

PRINTED MODULES WITH AND WITHOUT NEON - 20 AMP				SECRET KEY SWITCH MODULES - 20AMP				
1 WAY WARMING DRAWER DP	1 WAY WARMING DRAWER NEON DP	1 WAY COFFEE MACHINE DP	1 WAY COFFEE MACHINE NEON DP	INTERMEDIATE SECRET KEY SWITCH	2 WAY SECRET KEY SWITCH SP	2 WAY SECRET KEY SWITCH MARKED 'EMG LTG TEST' SP	1 WAY SECRET KEY SWITCH DP	
								
FINISH								
White (WHI)	K4896WDAWHI	K4896NDAWHI	K4896CMWHI	K4896NCMWHI	K4894WHI	K4898WHI	K4898ELWHI	K4917WHI
Black (BLK)	K4896WDABLK	K4896NDWABLK	K4896CMBLK	K4896NCMBLK	K4894BLK	K4898BLK	K4898ELBLK	K4917BLK
BS EN 60669-1:1999				These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999 Key (3405ZIC) is supplied.				

SECRET KEY SWITCH MODULES - 20AMP		INDICATOR UNIT MODULES						
EMERGENCY LIGHTING DP	2 WAY SECRET KEY SWITCH (BIASED 1 WAY) SP	200-250V NEON	200-250V NEON	200-250V FLUORESCENT	21-36V FILAMENT	21-36V FILAMENT	21-36V FILAMENT	
								
FINISH								
White (WHI)	K4917ELWHI	K4918WHI	K4889RED	K4889AMB	K4889GRN	K4836RED	K4836AMB	K4836GRN
Black (BLK)	-	K4918BLK	K4889REDB	-	-	-	-	-
These switches do NOT have to be derated when used with fluorescent or inductive loads. BS EN 60669-1:1999 Key (3405ZIC) is supplied.			BS 5733:2010 B suffix on the list number denotes black inserts					
			Will Operate On Both A.C. And D.C					

DIMMER SWITCH MODULES				ACCESSORY MODULES		
Tungsten filament and low voltage lighting						
40W/VA-220W/ 180VA MAX 230V A.C., 50HZ 1 MODULE	60W/VA-400W/ 320VA MAX 230V A.C., 50HZ 2 MODULE	0-10V/1-10V FLUORESCENT CONTROLLER 1 MODULE	40-220W/180VA/ 4-70W LED INTELLIGENT DIMMER 1 MODULE	SINGLE TV CO-AXIAL OUTLET NON-ISOLATED	SINGLE TV CO-AXIAL OUTLET ISOLATED	
						
FINISH						
White (WHI)	K4501WHILV	K4500WHILV	K4499WHI	K4511WHILV	K4520WHI	K4521WHI
Black (BLK)	K4501BLKLV	K4500BLKLV	K4499BLK	K4511BLKLV	K4520BLK	K4521BLK
These dimmers employ the latest microcontroller based circuitry to provide electronic soft start and overload protection. Suitable for use with good quality electronic or wire wound transformers. Can also be used with good quality mains voltage halogen lamps incorporating GU10 bases. Please check with lamp manufacturer to determine suitability. K4501WHI/BLK Max. No. of low voltage T/F's – 3 K4500WHI/BLK Max. No. of low voltage T/F's – 5 Not suitable for fluorescent loads. All dimmers have push on – push off, 2 way switches, integral with rotary control. NOTE Refer to technical section for derating. Conform to BS EN 60669-2-1 and BS EN 55015			MK Fluorescent Grid Dimmers are low voltage controllers for connection to 1-10V controllable ballasts.	K4511WHILV 1 Module 2 Way 40-220W/180VA/4-70W LED Intelligent Dimmer. K4511BLKLV 1 Module 2 Way 40-220W/180VA/4-70W LED Intelligent Dimmer. For direct connection to TV or FM aerial co-axial download. NOT to be used in same enclosure as mains exceeding 50V. BS 3041:1977 IEC 169-2:1965 BS 5733:2010 where applicable.		

Product selector

ACCESSORY MODULES					
	200-250V A.C. BUZZER UNIT	21-36V A.C. BUZZER UNIT	16A CORD OUTLET	13A FUSE UNIT	13A FUSE UNIT WITH TAMPERPROOF SCREW
					
FINISH					
White (WHI)	K4000WHI	K4001WHI	K4886WHI	K4890WHI	K4890KOWHI
Black (BLK)			K4886BLK	K4890BLK	K4890K0BLK
	SOUND OUTPUT LEVEL Av 61 db @ 15 feet. BS 5733:2010		Complete with 3 pairs of terminals. The supply terminals are suitable for up to 2 x 2.5mm ² or 1 x 4mm ² solid conductors. The load terminals are suitable for one 1.5mm ² flexible cord. A cord grip is also fitted. BS 5733:2010	Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010	Fuse carrier comes with 13A cartridge fuse link to BS 1362. BS 5733:2010 Key (3405ZIC) is supplied.

Honeywell International - Middle East

EMAAR Business Park, Building 2, Level 2,
 Office 201, Sheik Zayed Road, P.O. Box 232362
 Dubai, U.A.E.
 Tel: +971 4 450 5800
 Fax: +971 4 450 5900

getconnected.me@honeywell.com
 www.mkelectric.com

UKMK448-0525-ME
 © 2025 Honeywell International Inc.

