

# MB- TOUCHSCREEN CONTROL PANEL

The graphical MB touchscreen control panel offers simple, fast, intuitive and safe operating comfort with its user interface.

Touch screen control panel for operation on the control panel series

MB-Secure and MB-12/24/48/100/256 plus.

With a new, clear menu structure for time-saving and intuitive operation thanks to easy-to-understand symbols and icons.

The built-in mifare DESFire and proX readers enable quick access to all relevant information. The capacitive touchscreen with a variety of setting options and the attractive and robust design fits into any environment. The flat housing enables easy and quick surface-mounted or cavity wall installation with the same device, without any additional accessories.





The project-related programming of the intruder alarm panel and the TouchCenter plus is carried out via a PC/laptop with the appropriate software package.

## FEATURES AND BENEFITS

- Capacitive 9" touchscreen in Tablet design
- BUS-2 interface to MB-Secure and MB-12/24/48/100/256plus
- Flat plastic housing, optionally surface-mounted or Cavity wall installation
- Only 30 mm for surface mounting or 16 mm for cavity wall mounting
- Readers for IK2/proX1 and IK3/proX2 Integrated data carrier
- Integrated reader for mifare / mifare DESFire EV1 and EV2
- LED indicators (red, green, yellow and blue) for status display
- Dialogue-led intuitive User guidance with symbols
- Plain text display of all messages
- Clear display of the system status
- Flash technology for updates
- Different national languages possible
- Up to 50 control panels in one
- MB-Secure can be connected MB Classic up to 12

## DIMENSIONS AND VIEWS

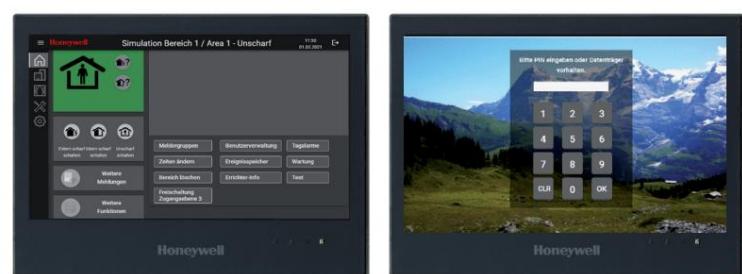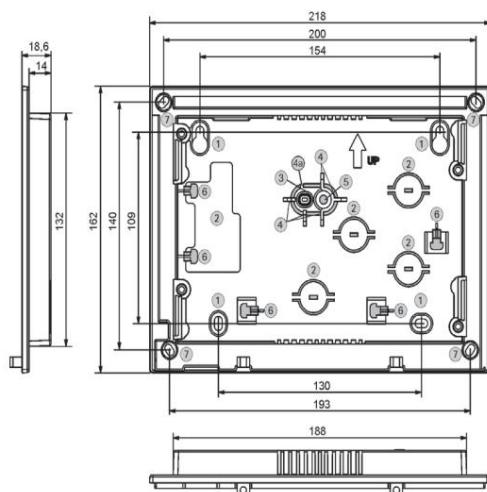

**Honeywell**

# TECHNICAL DATA

Rated operating voltage	12VDC
Operating voltage range	9V DC to 15V DC
Current consumption at 12 V DC	190 mA (at rest) 230 mA (max. screen brightness) 390 mA (max. screen brightness + buzzer)
Integrated devices	Reader for IK2/proX1, IK3/proX2 and mifare DESFire EV1, EV2, approx. 3cm reading distance
Frequency range	125 kHz < 10 dB $\mu$ A/m at 10 m distance, 13.56 MHz < 0 dB $\mu$ A/m at 10 m distance
Protection class according to EN 60529	IP30
Environmental class according to VdS	II
Environmental class according to EN 50131-3	Class II
Operating temperature range	-5°C to +45°C
Storage temperature range	-25°C to +60°C
Relative humidity	< 93% non-condensing
Weight	850g
Screen diagonal/resolution	9" (22.8cm)
Screen format	16:9
Dimensions (W x H x D):	218x162x30mm
Color	white, similar to RAL 9016 black, similar to RAL 9017
VdS recognition	G121014 Class C
EN conformity	EN50131-3: Grade 3 Class II
SES	EMA-RL-T2:2021-04



013080, white



013081, black

## ORDER DETAILS

013080 MB touchscreen control panel, white  
013080 MB touchscreen control panel, black

### Further information

[www.security.honeywell.de](http://www.security.honeywell.de)

### Honeywell Commercial Security

Novar GmbH

Johannes-Mauthe-Str. 14

72458 Albstadt

Germany

[www.honeywell.com](http://www.honeywell.com)

Errors and changes excepted.

HSFI-MB-TS-01-DE(0324)DS-H

© 2024 Honeywell International Inc.

THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT

**Honeywell**