

60 SERIES AI IP CAMERAS

Take Advantage of Honeywell's 60 Series IP Cameras

Honeywell is taking quality and reliability to the next level with the 60 Series AI IP cameras suited for a wide range of indoor or outdoor applications. Choose from 2MP or 4MP dome or bullet cameras or 5MP box camera or 4MP IR PTZ models. All models offer exceptional picture clarity and extreme low light performance flexible system integration, secure data transmission and easy installation.

Superior HD Image Quality, Up To 5MP

- Up to 5MP (2560x1920) cameras
- True WDR up to 140 dB ensures glare-free images
- True day/night provides vivid color images by day and clear black and white images at night using a removable IR cut filter
- Excellent low-light performance with 2D/3D noise reduction saving storage and bandwidth together with smart codec⁽²⁾
- For use as part of Video Systems which comply with NDAA Section 889
- Extreme low light in color 0.005 lux

Flexible Surveillance Solution

- A wide range of lenses and zoom options for all types of installations
- H.265⁽¹⁾, H.264, smart codec⁽²⁾ and MJPEG supported with triple streaming
- Adaptive smart IR technology provides even distribution of IR LEDs in dimly lit or nighttime scenes
- Water/Dust proof (IP 66/67)(out door camera) and IK10 and NEMA 4X (optional)
- ONVIF profile S/G/T/M compliant
- Secure authentication chipset built-in
- Built-in AI based video analytics to reduce the false alarms in perimeter protection, including smart motion, intrusion, multi loitering, people counter, face detection, line crossing detection, unattended object detection, missing object detection



ONVIF® | SGTM 5 YEAR WARRANTY

Easy To Install And Use


- Built-in PoE eliminates separate power supply and associated wiring; 24VAC/12VDC inputs where PoE power is unavailable
- Multiple mounting options to support a wide range of security applications
- Multiple language GUI⁽³⁾(15 countries)
- Unified camera configuration tool for the batch configuration

Onboard Video Storage

- Supports microSD (Class 10) card up to 1TB for encrypted local video storage (card not included)

Market Opportunities

These fully featured attractive cameras are perfect for various types of security installations, from complete area coverage with speed dome cameras to high resolution true Day/Night cameras for any scenario. The 60 Series provides excellent picture clarity at minimal bandwidth while offering maximum protection against dust and water. Boasting modern designs and offering up to 5MP high definition images, these cameras are suited for a wide range of security applications.

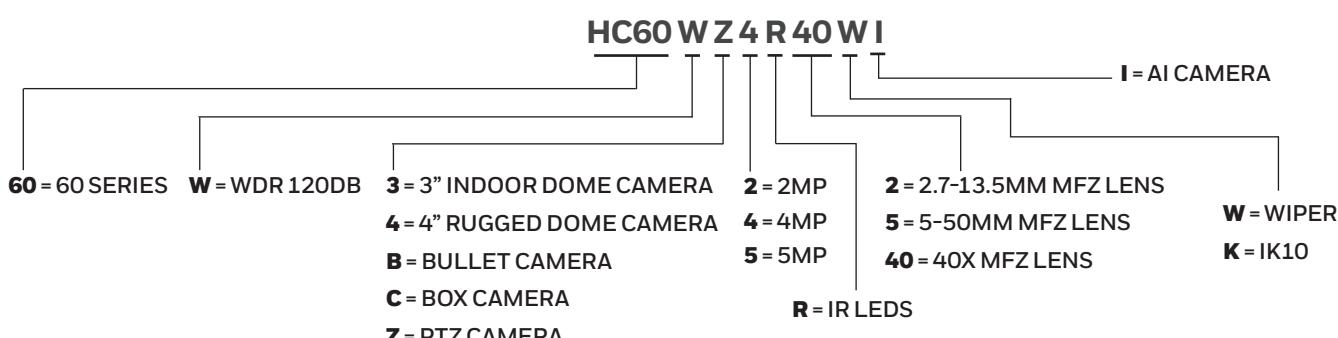

(1): Covered by one or more claims of the patents listed at patentlist.hevcadvance.com.

(2): Smart Codec saves up to 50 percent on bandwidth and storage compared to standard H.264/H.265 (Scene Dependant).

(3): Supplied with English, French, German, Spanish, Italian, Japanese, Portuguese, Russian, Arabic, Czech, Korean, Dutch, Polish, Turkey, Traditional Chinese.

Honeywell

60 SERIES AI IP CAMERAS

ORDERING

	ORDERING
HC60W34R2I	4 MP Ultra Low-light IR Indoor Dome Camera, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm In/Out, IK10 (Bubble only)
HC60W32R2I	2 MP Ultra Low-light IR Indoor Dome Camera, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm In/Out, IK10 (Bubble only)
HC60W44R2I	4 MP Ultra Low-light IR Rugged Dome Cameras, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm in/out, IK10
HC60W42R2I	2 MP Ultra Low-light IR Rugged Dome Cameras, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm in/out, IK10
HC60WB4R2I	4 MP Remote Outdoor Bullet Camera, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm in/out, IK10
HC60WB2R2I	2 MP Remote Outdoor Bullet Camera, WDR 140 dB, 2.7 ~ 13.5 mm, PoE 802.3af, DC12V, Audio & Alarm in/out, IK10
HC60WB4R5I	4 MP Remote Outdoor Bullet Camera, WDR 140 dB, 5 ~ 50 mm, PoE 802.3af, DC12V, Audio & Alarm in/out, IK10
HC60WZ4R40WI	4 MP Network IR PTZ Camera, WDR 140 dB, 1/1.8" CMOS, 40X Optical Zoom, TDN, H.265 HEVC Smart Codec, PoE 802.3bt, 24VAC, IP66, with wiper
HC60WZ4R40KI	4 MP Network IR PTZ Camera, WDR 140 dB, 1/1.8" CMOS, 40X Optical Zoom, TDN, H.265 HEVC Smart Codec, PoE 802.3bt, 24VAC, IP66, IK10
HC60WC5I	5 MP Ultra Low-light Box Camera, WDR 140 dB, PoE 802.3af, DC12V, Audio & Alarm In/Out, ABF

60 SERIES AI IP CAMERAS

MODEL	DESCRIPTION
HA60WLM3	60S wall mount bracket for 3 inch dome, white
HA60PMC3	60S flush mount adaptor for 3 inch dome, black
HA60CB3I	60S replacement Dome, 60 series indoor bubble (Clear)
HA60JCBH1	60S dome junction box
HA60WLM4	60S wall mount bracket for 4 inch dome, white
HA60PMC4	60S pendant mount adapter, 1.5NPT (outside),3/4NPT (inside)
HA60CB4I	60S replacement dome, 60 series outdoor bubble (clear)
HA60APR	60S outdoor dome adapter plate and rubber
HA60JCBH1	60S junction box
HA60PLMZ	60S pole mount adapter
HA60CNMZ	60S corner mount adapter
HA35JCBHBA	35S bullet junction box
HA60LM28V12DC	60S lens 2.8~12 mm MFZ, DC-Iris
HA60LM5V50DC	60S lens 2.8~12 mm MFZ, DC-Iris
HA60BHWB	60S box camera housing with wall mount bracket, IP66
HA60WLMZI	60S wall mount bracket
HA60PLMZI	60S pole mount bracket
HA60CNMZI	60S corner mount bracket
HA60CLM01	60S pendant mount base
HA60CLM02	60S pendant extension pipe

For more information

<https://hwll.co/securityAE>
buildings.honeywell.com/security

Honeywell Commercial Security

Emaar Business Park, Sheikh Zayed Road
 Building No. 2, 2nd floor, 201
 Post Office Box 232362
 Dubai, United Arab Emirates
 Tel: +971 4 450 5800
www.honeywell.com



HEVC Advance™

ONVIF and the ONVIF logo are trademarks of ONVIF Inc.
 HEVC and the HEVC logo are trademarks of HEVC Advance.
 Honeywell reserves the right, without notification, to
 make changes in product design or specifications.

HSV-60SeriesQRG-08-ME(0923)DS-Y
 © 2023 Honeywell International Inc.

Honeywell