



VRx 2000

Overview

The VRx™ next-generation video management system provides a unified access control and video surveillance experience when used in conjunction with the NetBox™ access control system, Magic Monitor® unified client and Cumulus™ cloud-based service.

The VRx 2000 server supports up to 150 IP cameras and 144TB of video storage, making the system well suited for large security deployments. It is available as a stand-alone system and also tightly integrates with NetBox access control systems.

Real-time video and audio monitoring and recorded playback are accessible through the Magic Monitor client. By clicking on an icon in the activity log, users can instantly play back recorded video associated with an event and save it to the case library. Additional features include on-screen PTZ controls and integration of live video views into floor plan graphics. VRx also includes new installation features that optimize efficiency by streamlining the setup process. Further, you can keep your system secure with VRx's ability to update all of your camera passwords at once.

The VRx 2000 server can also manage and display crowdsourced video. Video footage submitted to the security team can be stored on the server and made available for forensic investigation.

The VRx system seamlessly fits into the NetBox ecosystem, allowing the entire solution to easily scale with organizational growth. The Linux-based VRx server appliance is plug-and-play and operates similarly to other NetBox ecosystem products, making it easy to set up, configure and maintain.


Key Features

Video Management

- **ONVIF®:** Supports ONVIF Profile T cameras
- **Cameras:** Supports up to 150 IP cameras
- **Failover:** A single failover VRx recorder can monitor up to four VRx recorders for uninterrupted recording
- **High-Quality Video:** Supports 4K cameras and H.265 codec
- **Crowdsourced Video:** Manages video submitted from the organizational community, making it available for playback during forensic investigation
- **Real-Time Surveillance:** Allows for live video tours and on-screen PTZ controls using the Magic Monitor client
- **Forensic Search:** Locates recorded video of interest with a single click and saves it to the case library
- **Storage:** Supports up to 144TB of internal RAID 5 or RAID 6 video storage with hot spare option
- **Storage Management:** Provides a simple user interface to add or replace storage drives in the field

System

- **IP Video Server:** Delivers real-time and recorded video to client
- **Access Control Integration:** Integrates with NetBox access control systems for unified system management and administration
- **Customizable Monitoring Displays:** Provides customization of real-time monitoring displays, with single or multi-camera views
- **Mobile App:** Allows for mobile security management using the Mobile Security Professional® app

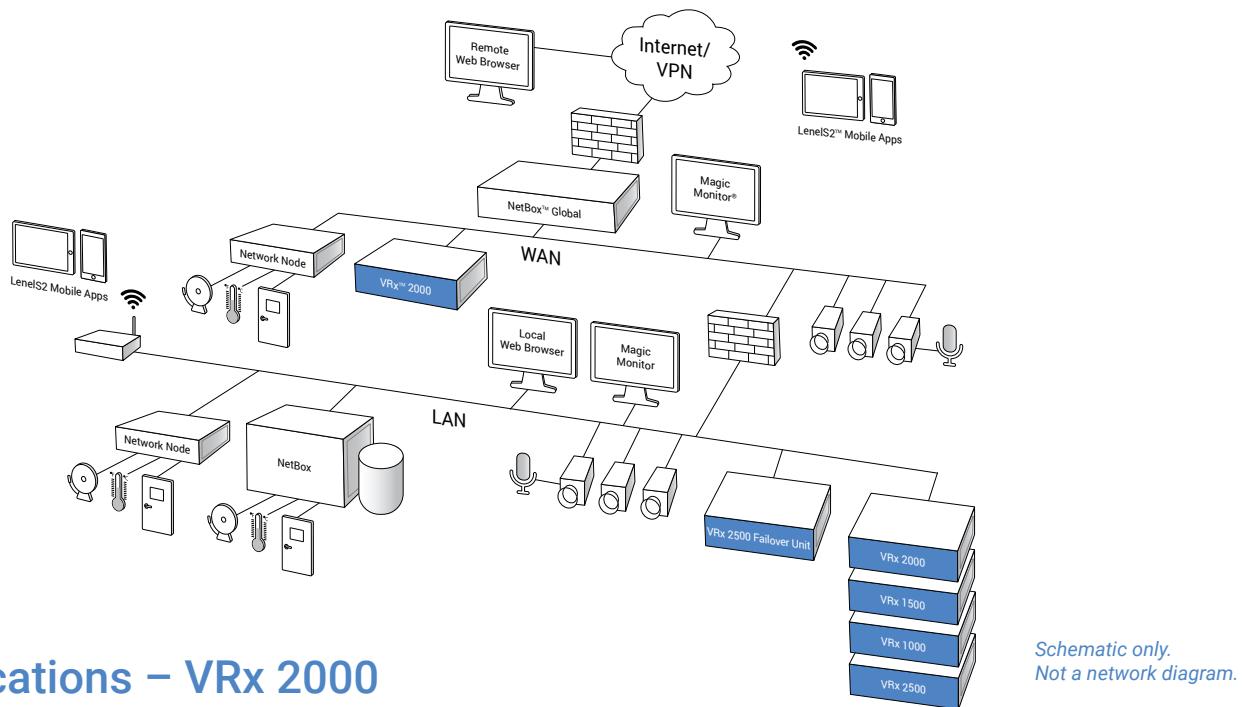

Specifications – VRx 2000

Video Management		Appliance (continued)																																									
IP Camera Streams	Up to 150	Weight	73 lbs (33.1 kg) maximum																																								
IP Camera Resolution	Camera dependent, up to 4K	Operating Temperature	50° – 95°F (10° – 35°C)																																								
IP Camera Frame Rate	Camera dependent	Storage Temperature	-40° – 149°F (-40° – 65°C)																																								
Compression Type	H.264 or H.265 (camera dependent)	Operating Environment	Humidity 80%, non-condensing 84°F (29°C)																																								
Appliance		Redundant Dual Power Supply	750W																																								
Video Storage	144TB maximum capacity using 4TB, 8TB, or 12TB hot swappable 3.5in drives; 12 HDD slots	AC Input	100 – 240 VAC, 50/60 Hz, 10A/5A																																								
Storage Configuration	RAID 5 or RAID 6; optional hot spare	BTU Maximum	2,891 per hour																																								
Processor	Intel® Xeon® Silver	Regulatory Approvals	UL, CE, FCC, RoHS																																								
Memory (RAM)	16GB	Warranty	3 years, hardware; 3 years, software																																								
Operating System	Ubuntu Linux	Client Requirements																																									
OS/Application Storage	240GB SSD	Processor	Windows 10 (64 bit), macOS High Sierra and later	Ethernet Ports	4	Memory (RAM)	Intel Core i3 or higher	Max Video Throughput (Aggregate Inbound + Outbound)	1.2 Gbps	Hard Drive	8GB minimum	MTBF	41,200 hours	Part Numbers		Chassis	Standard 2U rack mount, rail kit included	S2-VRX2000-G2	VRx 2000 appliance	Dimensions (H, W, D)	3.4in x 19.0in x 27.6in (87mm x 482mm x 701mm)	S2-VRX-2000-G2-FO	VRx Failover Appliance			S2-VRX-1C	Single IP camera license, expandable up to 150 IP cameras			S2-4TB-HDD-G2	4TB storage hard drive			S2-8TB-HDD-G2	8TB storage hard drive			S2-12TB-HDD-G2	12TB storage hard drive			S2-VR-RAID-HS	Hot spare configuration
Processor	Windows 10 (64 bit), macOS High Sierra and later																																										
Ethernet Ports	4	Memory (RAM)	Intel Core i3 or higher																																								
Max Video Throughput (Aggregate Inbound + Outbound)	1.2 Gbps	Hard Drive	8GB minimum																																								
MTBF	41,200 hours	Part Numbers																																									
Chassis	Standard 2U rack mount, rail kit included	S2-VRX2000-G2	VRx 2000 appliance																																								
Dimensions (H, W, D)	3.4in x 19.0in x 27.6in (87mm x 482mm x 701mm)	S2-VRX-2000-G2-FO	VRx Failover Appliance																																								
		S2-VRX-1C	Single IP camera license, expandable up to 150 IP cameras																																								
		S2-4TB-HDD-G2	4TB storage hard drive																																								
		S2-8TB-HDD-G2	8TB storage hard drive																																								
		S2-12TB-HDD-G2	12TB storage hard drive																																								
		S2-VR-RAID-HS	Hot spare configuration																																								



For more information, please visit lenels2.com.

Specifications subject to change without notice.

© 2025 Honeywell International Inc. All Rights Reserved. All trademarks and service marks referred herein are property of their respective owners.